



**PERLIGHT**  
smart.black

**PLM-270MA-54**

# **MONO DELTA BLACK**

**270 WATTS 54 CELLS**


The Mono Delta Black Series is the premium quality panel choice for aesthetics and high-performance. High-efficiency PERC cells and patented cell ribbon technology create a completely black solar module designed to integrate with new and existing buildings to provide great looking, high power arrays. Crafted with precision and expert skill, the Delta Black Series offers outstanding build quality and reliability from a trusted, high-quality manufacturer. Smart-Ready as standard, each module is equipped to deliver the latest advanced Smart technology thanks to its integrated Tigo TS4 junction box with Smart Module upgrade capability for real-time individual module monitoring, optimised performance for shade effected arrays and advanced safety functions.

Guaranteed by **PERLIGHT**

- ✓ Quality Guaranteed
- ✓ Positive output tolerance
- ✓ 12 Year Workmanship Warranty
- ✓ 25 Year Output Performance Warranty
- ✓ >90% Output for 12 Years
- ✓ >80% Output for 25 Years
- ✓ Over 30 Years Manufacturing Experience

Powered by **Tigo**

- ✓ Field replaceable diode cover
- ✓ Lower junction box temperature
- ✓ Upgradable to add functionality
- ✓ Cover upgrade options:
  - Module-level monitoring
  - Advanced Safety
  - Optimisation
  - Long Strings
- ✓ Approved by all major inverter manufacturers

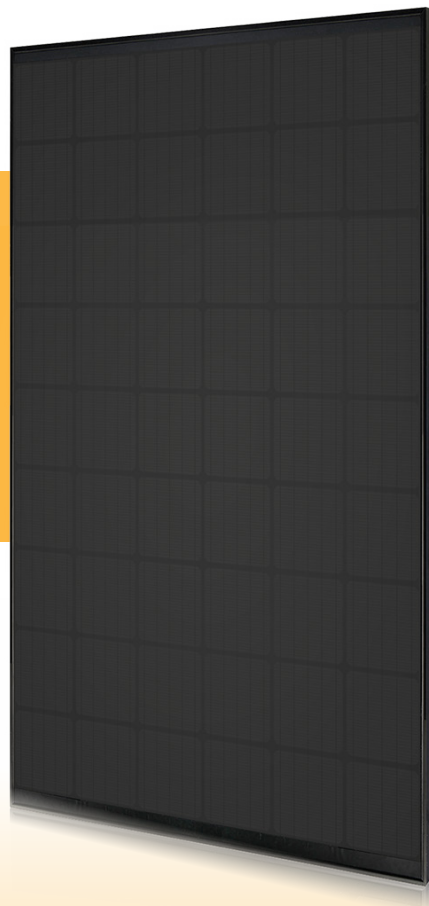

**18.37%**  
MAX EFFICIENCY

**270W**  
MAX POWER OUTPUT

**SMART-READY**  
LOW COST UPGRADES

**PERC**  
PASSIVE EMITTER REAR CELL TECH


**12 YEAR**  
PRODUCT WARRANTY

**25 YEAR**  
PERFORMANCE WARRANTY





**PERLIGHT**  
smart.black

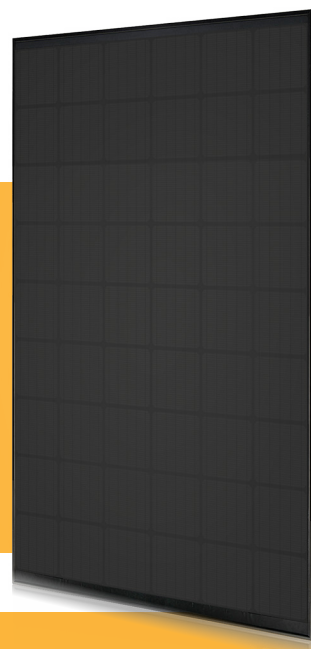


PLM-270MA-54


# MONO DELTA BLACK

270 WATTS 54 CELLS

## MODULE FRAME

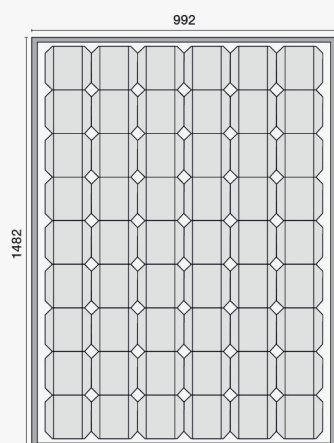

35

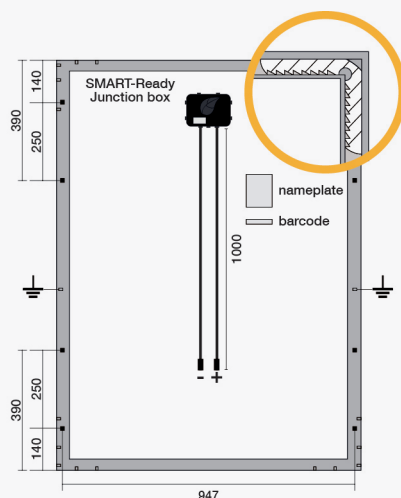

- ✓ Extremely reliable screw-less, interconnected frame for long-term flexibility and strength.
- ✓ 8 mounting holes for direct mounting option.
- ✓ Suitable for Insertion System on both long and short sides.
- ✓ 20 in-built drainage waterspouts.
- ✓ 2 earth (ground) points.
- ✓ Tempered ARC (anti-reflective) Front Glass.

Long Side Clamping Zones:  
0mm to 410mm from edge.

Short Side Clamping Zones:  
0mm to 248mm from edge.

All measurements in mm. Mounting-hole size:  $\varnothing 9 \times 14$ .

## MECHANICAL CHARACTERISTICS

Front cover	3.2mm Tempered ARC glass
Backsheet colour	Black
Type of Cells	Mono PERC 156.75x156.75mm
Number of Cells	54
Frame	Black Anodised Aluminium
Junction box	TIGO TS4 IP67
Cables	1000mm/4mm <sup>2</sup>
Connectors	MC4 compatible IP67
Module dimensions	1482 x 992 x 35mm
Module weight	16.5kg

## OPERATING CONDITIONS

Max. system voltage	1000VDC
Limiting reverse current	15A
Operating temperature range	-40°C to 85°C
Max. static load front (e.g., snow)	5400Pa
Max. static load back (e.g., wind)	2400Pa
Max. hailstone impact	25mm@23m/s

## THERMAL CHARACTERISTICS



NOCT	45±2 °C
Temp. coefficient Pmax	-0.40 %/°C
Temp. coefficient Voc	-0.30 %/°C
Temp. coefficient Isc	0.06 %/°C
Temp. coefficient Vmpp	-0.35 %/°C

## ELECTRICAL PERFORMANCE



Power Output	Pmax	W	270
Voltage at Pmax	Vmp	V	29.81
Current at Pmax	Imp	A	9.06
Open-circuit voltage	Voc	V	36.07
Short-circuit current	Isc	A	9.6
Solar Module Efficiency		%	18.37
Power Tolerance		%	-0/+3

STC: 1000W/m<sup>2</sup>, temperature 25°C, AM = 1.5g
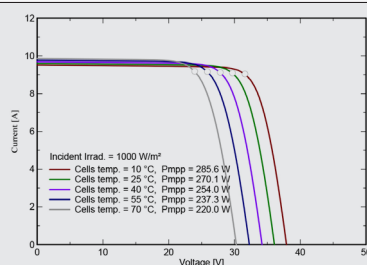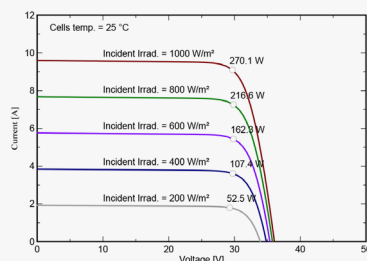
## ELECTRICAL CURVES



## CERTIFICATIONS

MCS Certified
Fire safety certified
PID-Free certified
Ammonia corrosion resistance certified
Salt mist corrosion resistance certified
Worldwide accreditation
 

## CONTACT INFO



**PERLIGHT**  
smart.black

**Perlight Solar Co., Ltd**  
Muyu Administration District  
Wenling, Zhejiang,  
317521, China  
[enquiry@perlight.com](mailto:enquiry@perlight.com)  
[www.perlight.com](http://www.perlight.com)



**WESTECHSOLAR**

**Westech Solar (UK) Ltd**  
Unit 1 Bobby Fryer Close,  
Garsington Rd, Oxford,  
OX4 6ZN, UK  
[info@westech-solar.co.uk](mailto:info@westech-solar.co.uk)  
[www.westech-solar.co.uk](http://www.westech-solar.co.uk)