



24 HT 80 4000 Series

Rolls 12V 80Ah (C20) Deep Cycle Battery






RESERVE CAPACITY		CCA	
@25AMPS	MCA@0°C	CCA@-18°C	
82 Mins.	405	324	

SPECIFICATIONS		
Nominal Voltage		12 Volt
Rated Capacity (20 hour rate)		120Ah
Dimensions	Height	238mm
	Length	276mm
	Width	171mm
Weight		21 Kg

PLATES	
Cells	6
Plates/Cell	12
Plate Height	127mm
Plate Width	143mm
Positive Thickness	3.18mm
Negative Thickness	2.08mm
Separator Thickness	1mm
Insulation Glass Mat	1mm

CHARACTERISTICS		
Capacity 77°F (25°C)	100 Hour Rate	106 Ah
	20 Hour Rate	80 Ah
	10 Hour Rate	68 Ah
Current (Amps)	100 Hour Rate	1.06
	20 Hour Rate	4
	10 Hour Rate	6.8
Electrolyte Reserve Above Plates	38 mm	

CONTAINER CONSTRUCTION	
Container	High Density Polypropylene
Cover	Polypropylene Sealed To Container
Terminals	Universal
Handles	Plastic Mounted To Ends

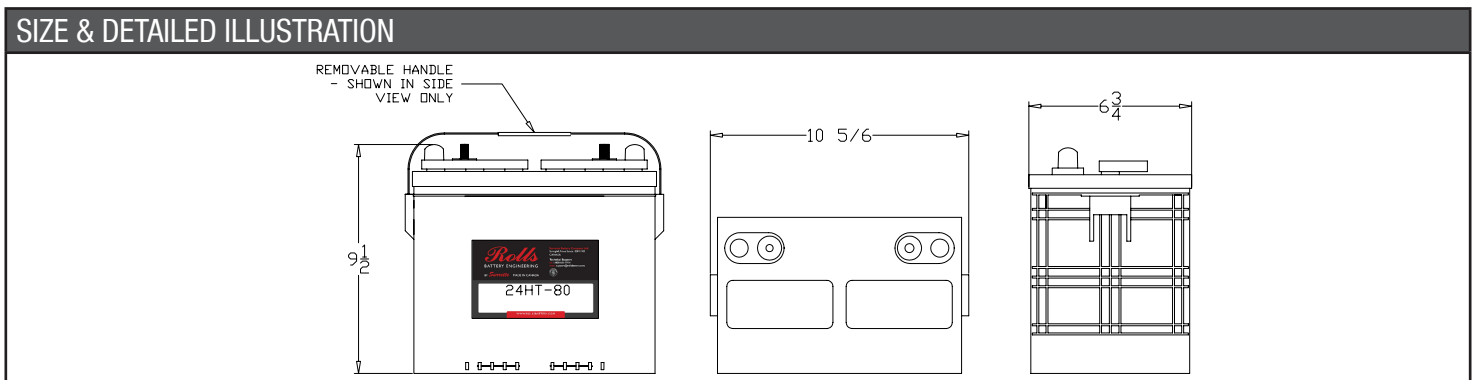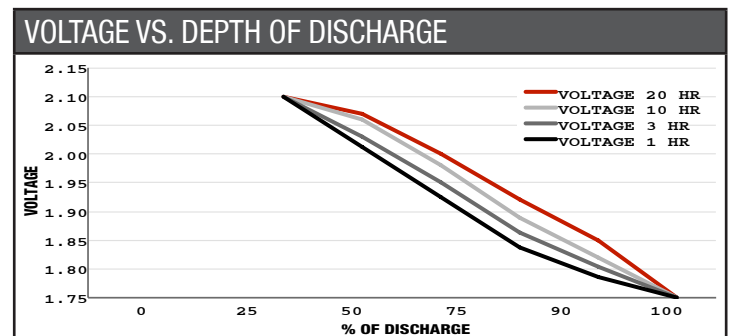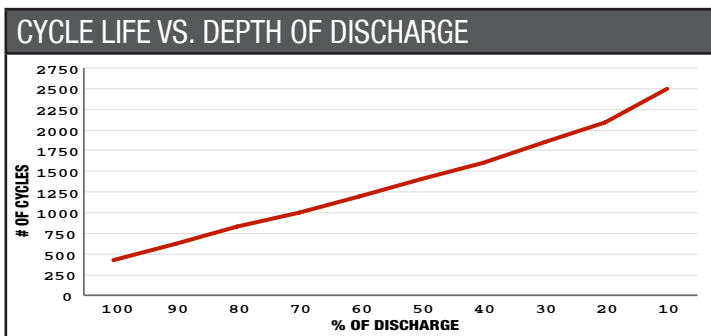

This information is generally descriptive only and is not intended to make or imply and representation, guarantee or warranty with respect to any cells and batteries. Call and battery design/specifications are subject to modifications without notice. For further information contact Rolls Battery Europe.

