



EU Type Examination Certificate Number: 0120/SGS0083/R1

EM-Lite Limited

1 Stevern Way Peterborough Cambridgeshire PE1 5EL

Instrument Identification: ECA1.* & EM*1.*

Single Phase, Credit, Active Import/ Export, Modular, Electricity Meter

Instrument Traceable Number 0120/ SGS0083

has been assessed and certified as meeting the requirements of

EU Directive 2014/32/EU

on Measuring Instruments Annex II, Module B

It is certified that the manufacturer's technical design and specimen for the above instrument has been examined and, based on the evidence submitted, it is considered that the instrument conforms to the requirements of Annex V of EU Directive 2014/32/EU

This certificate must be used in conjunction with a certificate covering the product verification as required in Annex II, Module D or Annex II, Module F

This certificate is valid for 10 years from 23rd March 2020 until 22nd March 2030

Issue 1

Certification is based on report number(s)
EMA146218 dated 24th May 2011
EMA149885 dated 12th August 2011
EMA155457 dated 17th January 2012
EMA190713 dated 23rd January 2015
EMA277441 dated 23rd March 20202

Authorised Signature



SGS United Kingdom Limited, Notified Body 0120 Unit 202B Worle Parkway, Weston-super-Mare, BS22 6WA UK t +44 (0)1934 522917 f +44 (0)1934 522137 www.sqs.com


Contact Address

SGS United Kingdom Ltd, Unit 12a & b, South Industrial Estate, Bowburn, Durham, DH6 5AD UK t +44 (0)191 377 2000 f +44 (0)191 377 2020 www.sgs.com

This document is issued, on the Client's behalf, by the Company under its General Conditions of Service printed overleaf.

The Client's attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein.

Any other holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention of the intervention of





0120/ SGS0083/R1

Issue Number: 1

Dated: 23rd March 2020

1. Technical Data

Manufacturer	EM-Lite Ltd
Meter Type(s)	ECA1.* & EM*1.*
Voltage Rating <i>(Un)</i>	220-240V
Current Rating (Imin - Iref (Imax))	0,25-5(100)A 0,5-10(100)A 0,75-15(100)A 1-20(100)A
Frequency (Fn)	50Hz
Active Accuracy Class (kWh)	A or B (kWh)
Type of circuit	1p2w
Temperature Range	-40°C to +70°C
Software/ Firmware Version No(s)	See list overleaf
CRC Checksum	See list overleaf
Identification Location	LCD
Bill Of Materials Number(s)	See list overleaf
IP Rating	IP52
Insulation Protective Class	Class II
LED Pulse Constant	1000 imp/ kWh
Impulse Voltage Rating	8kV
AC Voltage Rating	4kV
Main Cover Sealing Type	Wire & Crimp x 1
Integrity of meter	Inaccessible without breaking seals
Intended Location of the Meter	Indoor
Type of Register	LCD
Terminal Arrangement(s)	BS
Location of Manufacturers Address	Nameplate



0120/ SGS0083/R1

Issue Number: 1

Dated: 23rd March 2020

Bill of Materials

Meter Variant	BOM Number
ECA1. z	ECA1-4002-03
ECA1. y	ECA1-4001-05
EMA1.z	EMA1-4002-03
EMA1.az	EMA1-4003-07
EMA1.y	EMA1-4001-07
EMA1.ay	EMA1-4004-03
EMA1.x	EMA1-4002-03
EMA1.w	EMA1-4001-07
EMB1.z	EMB1-4002-03
EMB1.y	EMB1-4001-07
EMB1.ay	EMB1-4003-04
EMB1.x	EMB1-4002-03
EMB1.w	EMB1-4001-07
EMC1.z	EMC1-4002-03
EMC1.az	EMC1-4003-03
EMC1.y	EMC1-4001-06
EMC1.ay	EMC1-4004-02
EMC1.x	EMC1-4002-03
EMC1.w	EMC1-4001-06
EMC1.by	EMC1-4005-02
EMC1.cz	EMC1-4007-04



0120/ SGS0083/R1

Issue Number: 1

Dated: 23rd March 2020

Software Version Numbers

EMA1, EMB1, ECA1

V3.00-1

V3.02-0

V3.03-2

V3.04-0 Checksum 32995

V3.20-1 Checksum 61849

V3.20-2 Checksum 64953

V3.20-4 Checksum 60932

EMA1.y or .z, EMB1.y or .z

V3.10-0 Checksum 39352

V3.11-1 Checksum 16259

V3.11-2 Checksum 08820

V3.20-1 Checksum 61849

V3.20-2 Checksum 64953 V3.20-4 Checksum 60932

EMC1.*

V0.00-3

V1.00-0

V1.01-3

V1.02-0 Checksum 10305

V1.02-1 Checksum 22571

V2.00-1 Checksum 49889

V2.00-3 Checksum 40683

V3.00-0 Checksum 18714 V3.00-3 Checksum 25532

V3.10-1 Checksum 42711

EMC1.cz

V3.80-4 Checksum 19684




0120/ SGS0083/R1

Issue Number: 1

Dated: 23rd March 2020

2. Photograph of Meter EM*1 and Sealing Plan

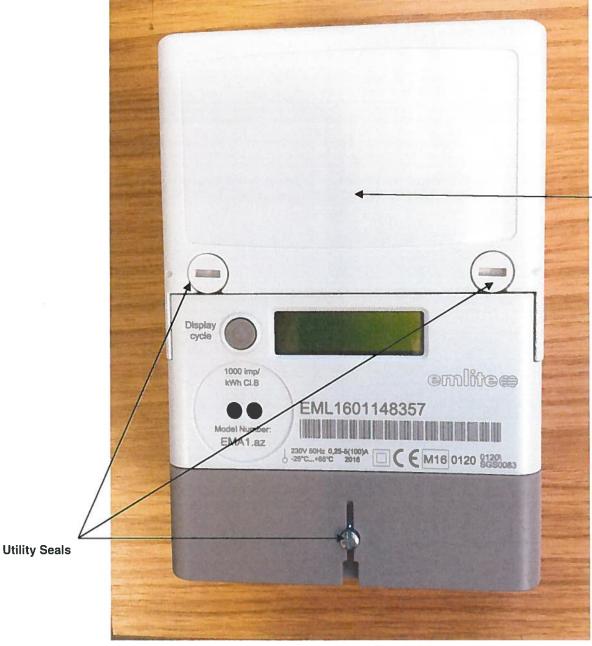

Main Cover Seal Beneath Cover




0120/ SGS0083/R1

Issue Number: 1

Dated: 23rd March 2020

Photographs of Meter EMC1w with MC11ba and MC11b Modules Fitted and Sealing Plan

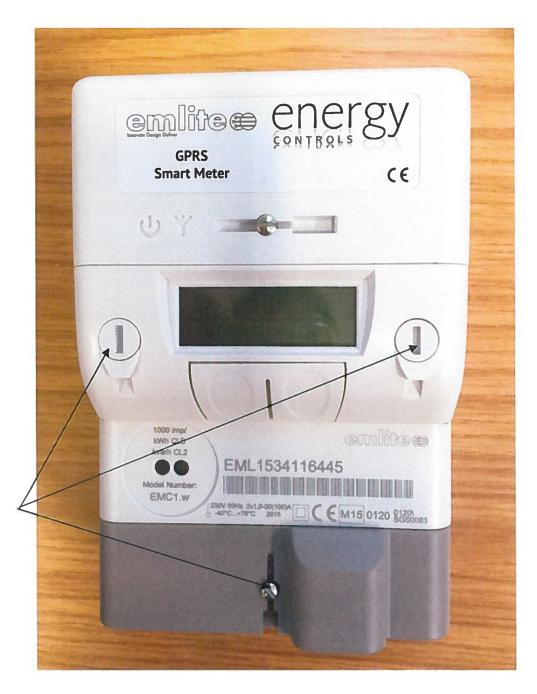

Utility Seals



0120/ SGS0083/R1

Issue Number: 1

Dated: 23rd March 2020

3. Examples of Nameplates





0120/ SGS0083/R1

Issue Number: 1

Dated: 23rd March 2020

4. Calculation of the composite error/ MPE

During the type approval examination the influence factors for temperature, frequency and voltage are determined per load point. The table below represents the sum of the square values per load, determined via the following formula:-

 $\delta \in (T, U, f) = \sqrt{(\delta e^2(T, I, \cos\varphi), \delta e^2(U, I, \cos\varphi), \delta e^2(f, I, \cos\varphi))}$

where

 $\delta e(T, I, \cos \phi) = Additional error due to variation of the temperature at the same load <math>\delta e(U, I, \cos \phi) = Additional error due to variation of the voltage at the same load <math>\delta e(f, I, \cos \phi) = Additional error due to variation of the frequency at the same load$

		Influence Factors for Temperature, Voltage & Frequency							
Current	PF Cos	-40°C	-25°C	-10°C	5°C	30°C	40°C	55°C	70°C
Imin	1.0	0.30	0.42	0.29	0.15	0.10	0.16	0.36	0.39
ltr	1.0	0.41	0.46	0.33	0.20	0.05	0.13	0.28	0.45
10ltr	1.0	0.23	0.11	0.03	0.04	0.14	0.17	0.24	0.33
lmax	1.0	0.28	0.09	0.09	0.14	0.25	0.27	0.37	0.25
ltr	0.5ind	0.31	0.48	0.39	0.29	0.17	0.14	0.20	0.24
10ltr	0.5ind	0.25	0.05	0.06	0.09	0.17	0.20	0.23	0.25
Imax	0.5ind	0.27	0.19	0.26	0.32	0.41	0.44	0.53	0.12
ltr	0.8cap	0.57	0.64	0.50	0.37	0.16	0.15	0.27	0.44
10ltr	0.8cap	0.24	0.15	0.06	0.04	0.13	0.16	0.24	0.38
Imax	0.8cap	0.27	0.07	0.10	0.17	0.30	0.33	0.43	0.28



0120/ SGS0083/R1

Issue Number: 1 Dated: 23rd March 2020

5. Annex of Variants

Product Variant Identification Details:

Type Designation	Description of meter
ECA1.z	4 terminal basic variant, no auxiliary connections, no modular comms,
ECA1.y	4 terminal with auxiliary relay, no modular comms, no breaker
EMA1.z EMA1.az EMA1.y EMA1.ay EMA1.x EMA1.w EMB1.z EMB1.z	4 terminal basic variant, no auxiliary connections 4 terminal basic variant, no auxiliary connections, no breaker 4 terminal with auxiliary relay 4 terminal with auxiliary relay, no breaker 4 terminal with external hub connections 4 terminal with auxiliary relay and external hub connections 5 terminal (100A Heating Control) basic variant, no auxiliary connections 5 terminal with auxiliary relay 5 terminal (100A Heating Control) with auxiliary relay, no breaker
EMB1.x EMB1.w	5 terminal with external hub connections 5 terminal with auxiliary relay and external hub connections
EMC1.z EMC1.az EMC1.y EMC1.ay EMC1.x EMC1.w EMC1.w EMC1.by MC11b + MC11a EMC1.cz	twin element basic variant, no auxiliary connections twin element basic variant, no auxiliary connections, no breakers twin element with auxiliary relay twin element basic variant, with auxiliary relay, breaker on element 2 twin element with external hub connections twin element with auxiliary relay and external hub connections twin element with auxiliary relay and external hub connections twin element basic variant, with auxiliary relay, breaker on element 1 smart module and gateway for use with all variants twin element basic variant, with 25A relay and breaker on element 2

Modifications to the meter(s) described according to approval No.0120/ SGS0083 must be notified to the issuing body to confirm the meter(s) continuing compliance to the relevant pattern approval standard(s).



0120/ SGS0083/R1

Issue Number: 1 Dated: 23rd March 2020

6. Document Revision History

Issue	Date	Comments
1	23/03/2020	Initial Issue

This document is Issued by the Company subject to its General Conditions for Certification Services, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.

Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 28 days only.

END OF CERTIFICATE