


# Solis-(25-40)K-5G, Solis-(40-50)K-HV-5G

## Solis 5G Three Phase Inverters



### Features:

- ▶ Over 98.8% Max. efficiency
- ▶ Wide voltage range and low startup voltage
- ▶ 3/4 MPPT design with precise MPPT algorithm
- ▶ THDi<3%, low harmonic distortion against grid
- ▶ Anti-resonance, single transformer can connect 6M+ in parallel
- ▶ Perfect commercial site monitoring solution
- ▶ 130% DC overload ratio, 13A input for each PV string
- ▶ Strings intelligent monitoring, Smart I-V Curve Diagnosis supported
- ▶ Fuse free design to avoid fire hazard
- ▶ Type II surge arrester for both DC and AC
- ▶ Natural convection, Fan-less design, longer lifespan
- ▶ Leakage current repression technology
- ▶ Volt-watt work mode integrated
- ▶ DC input reverse alarm
- ▶ Intergrated Export Power Manager(EPM)

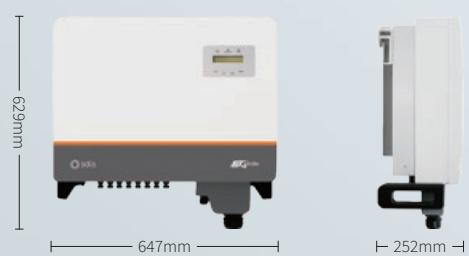

### Model:

400V:	Solis-25K-5G	Solis-30K-5G
	Solis-33K-5G	Solis-36K-5G
	Solis-40K-5G	
480V:	Solis-40K-HV-5G	Solis-50K-HV-5G

## Datasheet

Model Name	Solis-25K-5G	Solis-30K-5G	Solis-33K-5G	Solis-36K-5G	Solis-40K-5G	Solis-40K-HV-5G	Solis-50K-HV-5G
<b>Input DC</b>							
Max. input power	33kW	39kW	43kW	47kW	52kW	52kW	65kW
Max. input voltage				1100V			
Rated voltage				600V			
Start-up voltage				180V			
MPPT voltage range				200~1000V			
Max. input current		3*26A			4*26A		
Max. Short Circuit current		3*40A			4*40A		
MPPT number/Max. input strings number		3/6			4/8		
<b>Output AC</b>							
Rated output power	25kW	30kW	33kW	36kW	40kW	40kW	50kW
Max. apparent output power	27.5kVA	33kVA	36.3kVA	39.6kVA	44kVA	44kVA	55kVA
Max. output power	27.5kW	33kW	36.3kW	39.6kW	44kW	44kW	55kW
Rated grid voltage			3/N/PE, 220/380V, 230/400V			3/PE, 480V	
Rated grid frequency				50Hz/60Hz			
Rated grid output current	38.0A/36.1A	45.6A/43.3A	50.1A/48.1A	57.7A/52.0A	60.8A/57.7A	48.1A	60.1A
Max. output current	41.8A	50.2A	55.1A	60.2A	66.9A	53.0A	66.2A
Power Factor				>0.99 (Adjustable from 0.8 leading to 0.8 lagging)			
THDi				<3%			
<b>Efficiency</b>							
Max. efficiency				98.8%			
EU efficiency				98.3%			
<b>Protection</b>							
DC reverse-polarity protection				Yes			
Short circuit protection				Yes			
Output over current protection				Yes			
Surge protection (DC/AC)				Yes			
Grid monitoring				Yes			
Anti-Islanding protection				Yes			
Temperature protection				Yes			
Strings monitoring				Yes			
I/V Curve scanning				Yes			
Anti-PID function				Optional			
Intergarated DC switch				Yes			
<b>General Data</b>							
Dimensions (W*H*D)				647mm*629mm*252mm			
Weight				45kg			
Topology				Transformerless			
Self consumption				<1W (Night)			
Operating ambient temperature range				-25~60°C			
Relative humidity				0~100%			
Ingress protection				IP65			
Cooling concept				Natural convection			
Max. operation altitude				4000m			
Grid connection standard				EN50549, G99, AS4777.2-2015, VDE0126-1-1, IEC62727, VDE4105-2018, NB/T 32004			
Safety/EMC standard				IEC62109-1/-2, EN61000-6-2, EN61000-6-3			
<b>Features</b>							
DC connection				MC4			
AC connection				Terminal board			
Display				LCD, 2x20 Z.			
Communication				RS485; WiFi/GPRS (optional)			